



TOKAI HIT



www.tokaihit.com



TOKAI HIT Co., Ltd.

306-1, Gendoji-cho, Fujinomiya-shi,
Shizuoka-ken, Japan 418-0074
Phone: +81 544 24 6699 FAX: +81 544 24 6641
E-mail: solution@tokaihit.com



It is essential to read the instruction manual when using this device.

- Catalog printed August 2019
- Specifications and products in the catalog are subject to change without any obligation on the part of the distributor/manufacture.
- Copying and replication of the contents of this images and pictures are strictly prohibited. All Rights Reserved.

CA-ZEGEN-EN-03



TOKAI HIT[®]



Incubation System for microscopes
Stage Top Incubator[®]



Glass/Metal Heater for microscopes
Thermo Plate[®]

AI for Living cells
for your imaging[®]

TOKAI HIT will ...

Pursue the joy of inspiring our customers.

Manufacture products conscientiously.

Contribute to our community and society.

*All for living cells
for your imaging*

Temp., Humidity and CO₂ control instrument for Time-Lapse Imaging

Incubation System for microscopes

Stage Top Incubator[®]

Offers precision temperature, humidity and CO₂ control for cell culture on a microscope. Enables to conduct short and long term (more than 2 weeks) Time-Lapse Imaging.



■ **STX**

Happiness for Cells, Success for Researchers.

■ **Add-on Options**

Solutions for variety of experiments.

Control temperature around a microscope

ThermoBox for microscopes

ThermoBox


Maintains a stable cell culturing environment at places where Temp. fluctuation occur. By enclosing the microscope, it also prevents the focus drift caused by the thermal expansion of the microscope itself.

Automatic Thermo-control System (For IVF and basic research)

Glass/Metal Heater for microscopes

Thermo Plate[®]

Ensures more accurate and reliable thermal control of the specimens during the observation under a microscope. Wide product range supports Biotechnology Science and Industry. 10 year free-repair service for glass breakage is adopted.

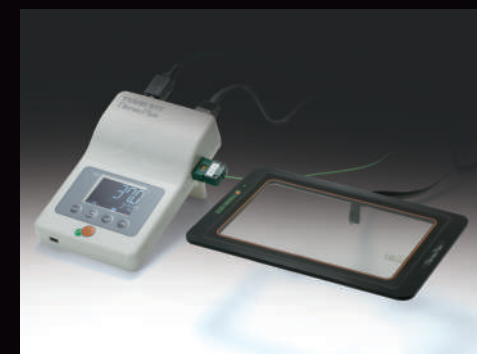

Incubation System for microscopes

Stage Top Incubator[®]


Offer precision temperature, humidity and CO2 control for cell culture on a microscope. Enables to conduct short and long term (more than 2 weeks) Time-Lapse Imaging.

Features

TEMP. Accurate and uniform temperature control

TOKAI HIT Heating Quality


Tokai Hit's original Top Heater is proven to distribute heat uniformly within the Chamber regardless of the type of vessels.

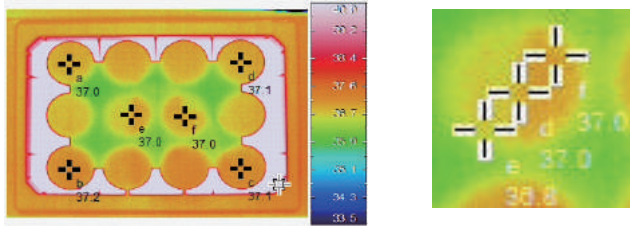

Uniform temperature distribution between wells and within a well.
* In our measurement environment



No interference by objective

With unique Top Heater Heating regulation, the bottom of Chamber is access-free for variety of objectives. (No metal plate at the bottom.)




Real-time Sample Feedback Regulation

Sterilized temperature sensor and magnetic lids make it easy to measure the temp. of culture media upon research needs. The controller regulates the heater based on the sensor signal to keep sample at the target temp. accurately.

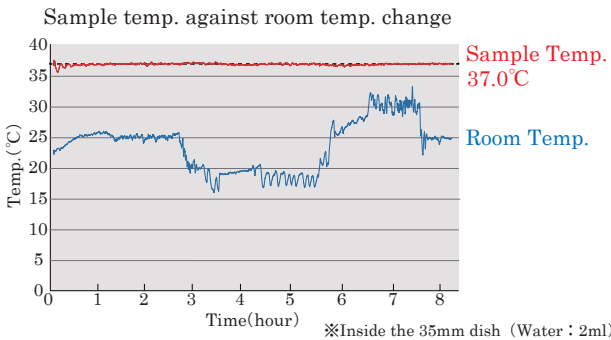

HUM. Keeps high-humidity over 95%

Keep the humidity level inside the chamber more than 95% by heating the distilled water in the Bath Unit. The internal humidifier minimizes the change in concentration of media by keeping the humidity inside the chamber.

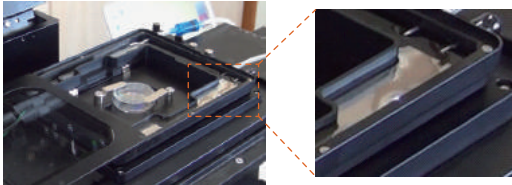

Internal humidifier by Bath Heater


CO2 Stable CO2 environment

The controller mixes 100%CO2 gas and the surrounding air automatically. Stable gas concentration inside the Chamber is obtained by keep sending the mixed gas to the Chamber. (※In case of controller with a built-in digital gas mixer)



REG. Prevent the focus drift

In addition to PID control, Continuous Current Control minimizes the focus drift generated by thermal expansion and it also prevents light intensity change compared to the conventional ON/OFF control.

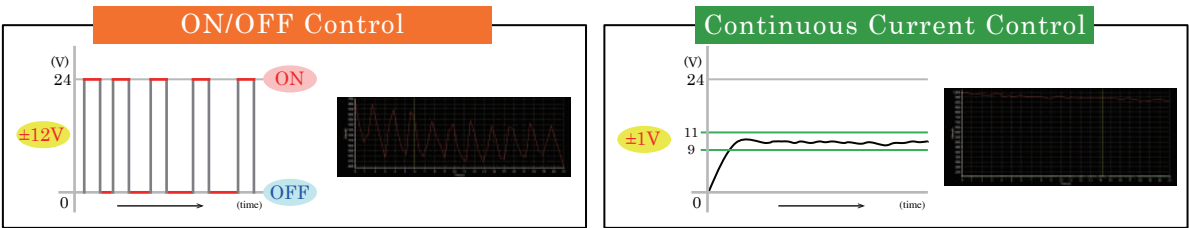

Chamber Components

Top Heater

Main heater which heats the specimen from the upper surface. The transparent glass heater prevents condensation and supports clear visibility.

Strengthen glass applied

Minimize the risk of glass breakage.

Dish Fixing Lid

Easy setting of vessels with magnetic lid.

Dish Attachment

Supports 35mm dish, 50/60mm dish, chamber slide, slide glass and chambered coverglass by changing one-touch magnetic holder.

Access Ports

For temperature sensor and tubing for media exchange and drug delivery.

Bath Unit

Keeps distilled water and embedded Bath Heater heats it directly from beneath to generate high-humidity inside the Chamber unit.

Lens Heater

Prevents heat escaping from the sample to the objective. Especially effective under high magnification, oil/water immersion observation.
* Can accommodate objectives up to ϕ 40mm.
Thin type and longer type are optional.


Easy Dish Fixing

Stable and easier "Magnetic" fixing




Even when the objective interferes with the bottom of the dish, a spring type buffering mechanism prevents breakage of the dish/objective.

<Normal use> <When objective interference>

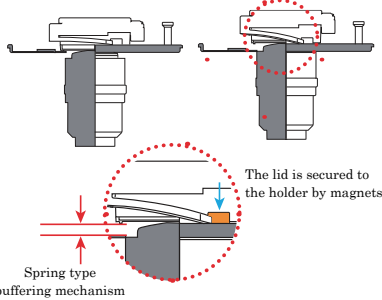


Wreck Proof Lens Heater Cord

Easy attachment and detachment with magnet relay connector prevents breakage of objective revolver and lens heater. It is also possible to lock by twisting the connector.

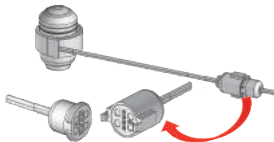


Stage Top Incubator Culture Results


Attribute	Name	Details	Period
Cultured Cell	STO	Embryo; fibroblast, mouse	Over 5 days
Cultured Cell	PC12	Pheochromocytoma; adrenal gland, rat (male)	Over 5 days
Cultured Cell	Hela	Adenocarcinoma; crvix, human (female, 31 years)	Over 5 days
Primary	Human Embryo	Human embryo in vitro; form fertilization to hatching blastocyst over 7 days	Over 7 days
Primary	Neurons	Development of rat cerebral cortical neurons	Over 4 days
Primary	Neural Stem Cells	Proliferation of neural stem cells of 14-day-old rat embryo	Over 7 days
Primary	Neural Stem Cells	Differentiation of rat neural stem cells to neurons and glial cells	Over 7 days
Primary	Hippocampal Neuron	E18 rat hippocampal neurons, cultured in CO2 incubator for the first day	Over 3 days
Primary	Cardiac Myocyte	Neonatal rat heart, fetal mouse, heart beat synchronization	Over 3 days

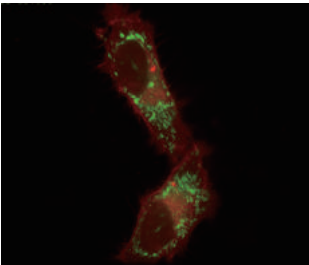


Courtesy of Dr. Takeharu Nagai
The Institute of Scientific and Industrial
Research, Osaka University

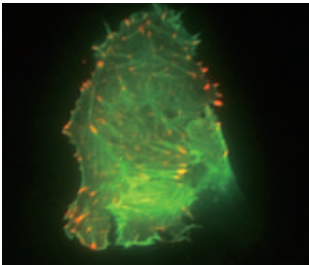

Paxillin actin tirf
Simon Watkins and Claudette St. Croix
Center for Biologic Imaging, University of Pittsburgh

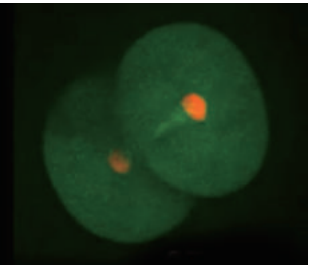

Courtesy of Dr. Kazuo Yamagata
Department of Genetic Engineering,
Kindai University

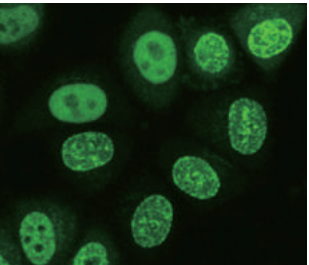

Courtesy of Dr. Hiroshi Kimura
Tokyo Institute of Technology



Visit <http://www.tokaihit.com> for more details regarding our products. (Accessible from the QR code)

STX

Standard Model Stage Top Incubator®

25 years of our technical know-how is here.

Happiness for Cells, Success for Researchers


To support successful cell culturing with new features,
“STX” is our answer to the optimized incubating environment.



Line-up

WSKMX series

- For Zeiss K-type frame stage
- Sample temperature : 30~40°C



- For well-plate and small vessels use

With built-in digital gas mixer
* for 100%CO₂ gas cylinder use

With built-in analog flow meter
* for premixed gas cylinder use



Model **STXG-WSKMX-SET**

Model **STXF-WSKMX-SET**

WSBX series

- For Zeiss piezo stage WSB-500
- Sample temperature : 30~40°C



- For well-plate and small vessels use








With built-in digital gas mixer
* for 100%CO₂ gas cylinder use

With built-in analog flow meter
* for premixed gas cylinder use



Model **STXG-WSBX-SET**

Model **STXF-WSBX-SET**

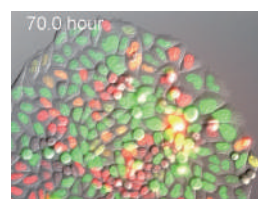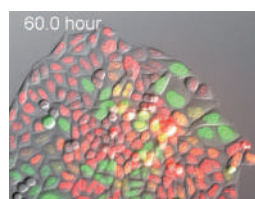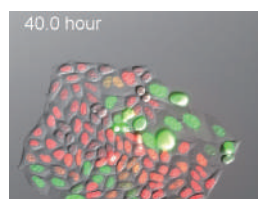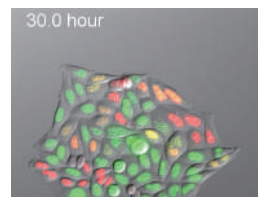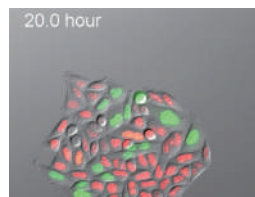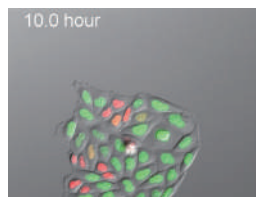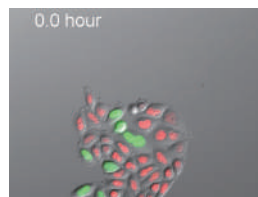


Courtesy of : Tetushi Hoshida, Asako Sakaue-Sawano, Atsushi Miyawaki, RIKEN

All for Living cells
for your imaging

Cooling/Heating Chamber

Sample temp. : 15~40°C (with dry lens) / 20~40°C (with oil/water immersion lens)

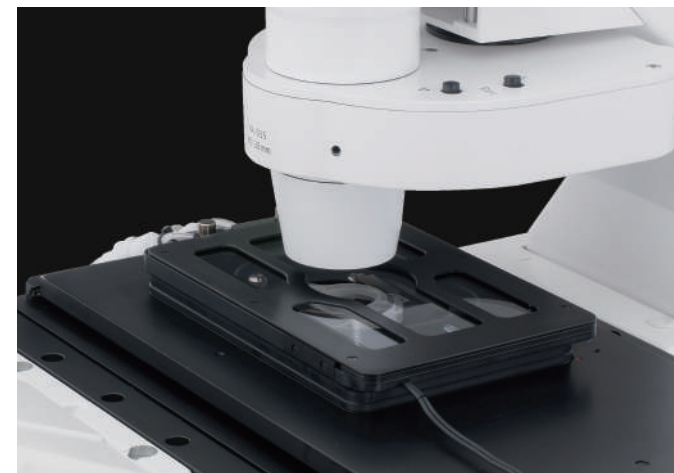

KRiX series

- For XY manual/motorized stage
- With Chiller Unit
- Sample Feedback regulation
- For small vessels use




With built-in digital gas mixer Model **STXGC-KRiX-SET**

With built-in analog flow meter Model **STXFC-KRiX-SET**


Uniform Temperature Distribution

Normally, it is difficult to control around room temp. because there is not big difference between room temp. and sample temp.. Since KRi series has both cooling and heating function independently, it can control around room temp. precisely.

Heating (Sample : 37°C)

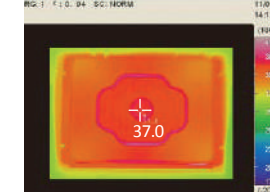

Cooling (Sample : 20°C)

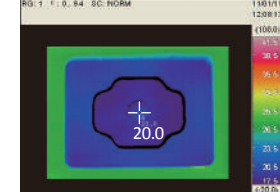

Dish Attachment



For 35mm dish

Cooling/Heating

Model **KRiX-D35**

Heating only

Model **ATX-D**

For slide glass, chamber slide, and chambered coverglass

Cooling/Heating

Model **KRiX-CSG**

Heating only

Model **ATX-CSG**

* One of Dish Attachment (For Cooling/Heating) is included as standard.

Exclusive Sensor Lid



For 35mm dish

(Included to the system as standard) Model **LX-D35**

For slide glass, chamber slide, and chambered coverglass

(Included to the system as standard) Model **LX-CSG**

For upright microscope

Sample temp. : 37°C

UKX series

- For XY mechanical stage of upright microscope
- For small vessels use




With built-in digital gas mixer Model **STXG-UKX-SET**

With built-in analog flow meter Model **STXF-UKX-SET**

Opening/Closing Top Heater

Metal Top Heater with this function make it easy to set the object positioning before imaging.

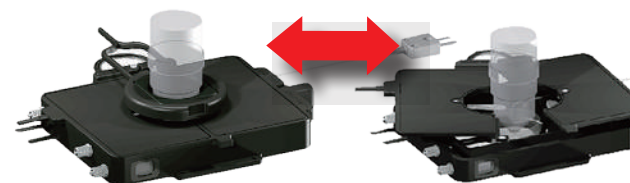

Dish Attachment

For 35mm dish **UKX-D35**

For 50/60mm dish **UKX-D56**

For slide glass **UKX-SG**

* One Dish Attachment is included as standard

Bracket

For manual stage **UKX-STD**

For Narishige fixed stage **UKX-FNS**

For Prior Z-deck **UKX-ZD**

For stages with 160x110mm opening **UKX-SPC-3**

* One-set is included as standard

Lens Heater

Lens Heater **UKX-LHD**

* Lens Heater is included as standard

Lens Heater Options

Lens Heater Adapter **UKX-LHA-□□**

Seal Ling **TMU-□□**

* □□ contains the diameter of the objective

* One-set is included as standard



Features

A fail-proof Incubation

Provides an easy, cleaver and accurate cellular environment.

Sample Feedback Mode

Sterilized temperature sensor makes it easy to measure the sample temperature. The controller regulates the Top Heater setting value automatically based on the feedback from the sensor to keep sample at setting value accurately.

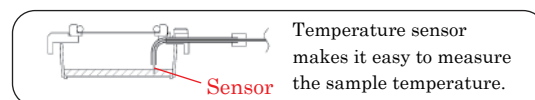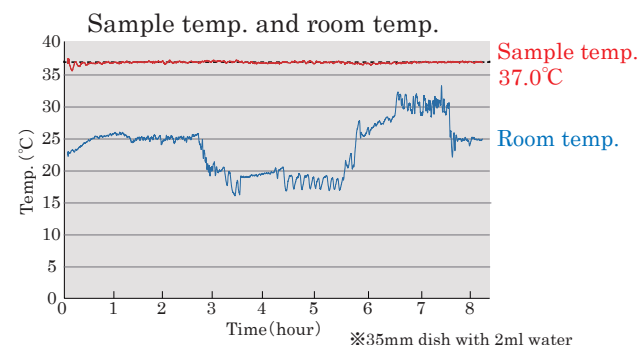

Feedback mode can be used to determine the suitable setting value of Top Heater in your actual room temperature/environment.

Stress-Free Quality

Intuitive operation and varieties of new functions are included to support cell culturing without stress.

STX-APP (Software)

Simple operation of GUI will assist to visualize the preparation to setting and lead your cell culture to success.



Screen Capture


Captures the PC screen to transfer images to smart-phones and tablets. Enables to see the image at home.

*PC must be connected with internet.



Programmable Control

The system includes the software to program temp. and CO₂/O₂ concentration as this function allows to expand the variety of experiment.

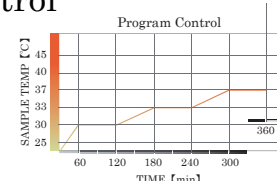

Data Logging

Logs the temperature of each heaters, sample temperature and gas concentration and saves the data in CSV format.



Simple Selections

Easy add-on and expand the application. Now available with common accessories as standard.

SET model

All Dish Attachment and Dish Fixing Lid are included as standard. No more complicated selection.

<SET components>

• Controller



• Chamber



• Feedback Sensor



• Extension Wire
• Software STX-APP
• USB cable
• Gas tube

• Dish Attachment



• Dish Fixing Lid




Options

• Dish Attachment



※The dish attachment for 35mm dish ×5 is also available.

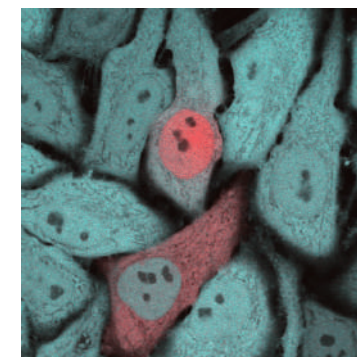

Courtesy of Dr. Takeharu Nagai
The Institute of Scientific and Industrial Research, Osaka University

Add-on options

Digital Thermometer for research



Precise temperature measurement is possible by using a thin sensor with Teflon covering and excellent chemical resistance.

Model **MC1000**
Indicate temp. by 1 degree C/0.1 degree C units
K-type thermocouple

<Components>
• Digital Thermometer
• Thermo Probe (TSU-200F)



■ Thermo Probe (Sensor type) Model **TSU-200F**
■ Extension Wire (1.5m) Model **HD1500**

IN/OUT Pipe for Media Exchange/Drug Delivery



For media exchange and drug delivery with incubation system for upright microscopes etc..

Model **PSBD1** Pipe OD 1.1mm
PSBD1H Pipe OD 1.1mm (with side holes)
PSBD2 Pipe OD 2.1mm
PSBD2H Pipe OD 2.1mm (with side holes)

35 mm Dish Spacer

When using the 35mm dish from IWAKI, Greiner and Nunc, recommended to use Dish Spacer at the bottom of the dish.



Model **35DI-BS** (left)
For 35mm dish from IWAKI
Model **35DGN-BS** (right)
For 35mm dish from Greiner and Nunc

Reusable 35 mm dish *Cyto-cell Chamber (Auto-clavable)

<Collaborative development with Prof. Takafumi Inoue, Waseda Univ.>

For a small amount of medium



Model **SCC12-D35-SET**
Cover glass size : φ 12.0 mm
Observation area : φ 9.6 mm

For wide range observation





Model **SCC12-D35-SET**
Cover glass size : φ 25.0 mm
Observation area : φ 21.0 mm

【Features】

- Whole bottom observation is possible.
No interferes with an objective even under high magnification.
- Running costs can be reduced.
By changing the consumable parts, the dish can be reused repeatedly.
- Observe with small amount of media.

※Consumable parts (Stainless steel plate, cover glass etc.) are also available.

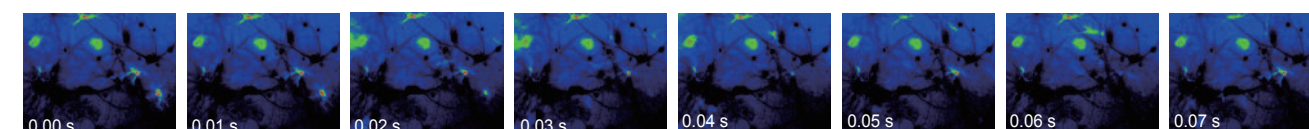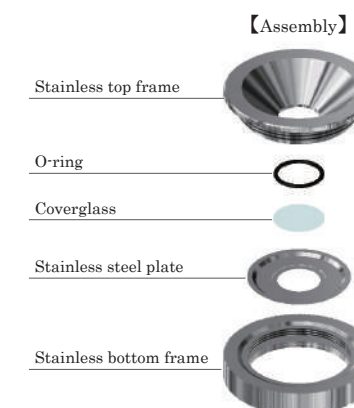

Calcium imaging captured with Cyto-cell chamber. (Fura-2 Fluorescent image)

Courtesy of : Prof. Takafumi Inoue,
Department of Life Science and Medical Bioscience,
Faculty of Science and Engineering, Waseda University

STX ECO

ECO Model
Stage Top Incubator®

We wish to introduce great cost performance system with 25 years of our technical know-how.

Deliver High-Quality system to everyone!

Features

Simple ECO model

Start time-lapsing without a hassle with our simple product selection and function.

Components

Controller



Model
STXG
With built-in digital gas mixer
or
STXF
With built-in analog flow meter

Chamber



Model
WELSX

Temperature Sensor



- Extension Wire
- Gas tube

Dish Attachment



Model
ATX-D For 35/50/60mm dish

Dish Fixing Lid




Model
LX-D35 For 35mm dish
LX-D56 For 50/60mm dish

Simple and high cell culture performance

Maintains a high-capability of cell culturing environment without complicated functions.


Heating Quality

Tokai Hit's original Top Heater is proven to distribute heat uniformly within the Chamber, regardless of the type of vessels.

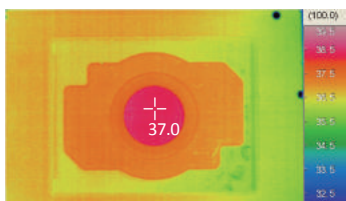


Temperature & Humidity

Saves complicated function but keeps a stable thermal environment under a determinate room environment. The built-in Bath Unit keeps the humidity level inside the Chamber more than 95%.

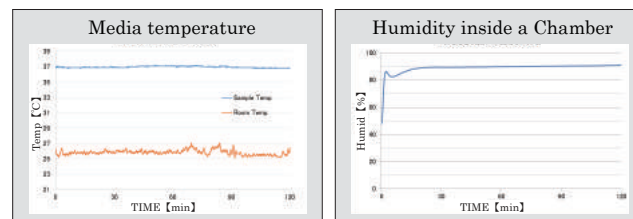

Universal Design


The external dimensions of the WELSX Chamber are 127.5×85mm, which are same size as well-plates. It could be used on all stage that fits a well-plate.

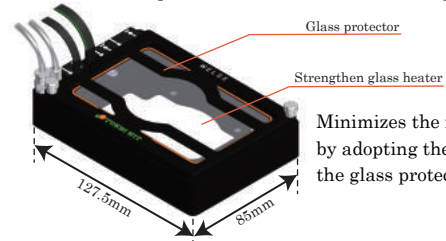

Minimizes the risk of glass breakage by adopting the strengthen glass and the glass protector.

Prevent the focus drift

In addition to PID control, Continuous Current Control minimizes the focus drift generated by thermal expansion and it also prevents light intensity change compared to the conventional ON/OFF control.

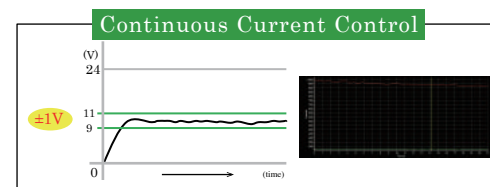

Various upgrade options

Various functions can be upgraded by adding on to STX-ECO model depending on your requirements.

STX-ECO model (-E) e.g. **STXG-WELSX-E**



ADD Dish Attachment & Fixing Lid (-C)



For slide glass, chamber slide and chambered coverglass use
Dish Attachment (Model **ATX-CSG**) + Fixing Lid (Model **LX-CSG**)

ADD Real-time Sample Feedback Regulation (-F)

Sterilized temperature sensor and magnetic lids make it easy to measure the temp. of culture media upon research needs. The controller regulates the heater based on the sensor signal to keep sample at the target temp. accurately.

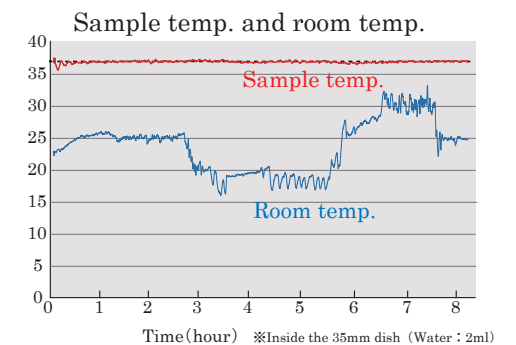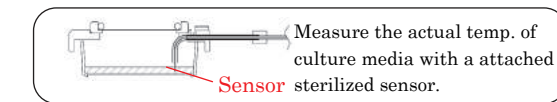

ADD Software Control (-A)


STX-APP (Tokai Hit original software) has intuitive operation and varieties of functions.

<Data Logging>



Logs the temperature of each heaters, sample temperature and gas concentration and saves the data in CSV format.

<Program Control>

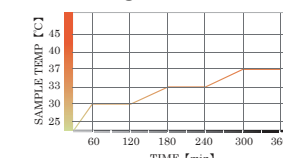


The system includes the software to program temp. and CO₂/O₂ concentration as this function allows to expand the variety of experiment.

<Screen Capture>



Captures the PC screen to transfer images to smart-phones and tablets. Enables to see the image at home. * PC must be connected with internet.

Selection example

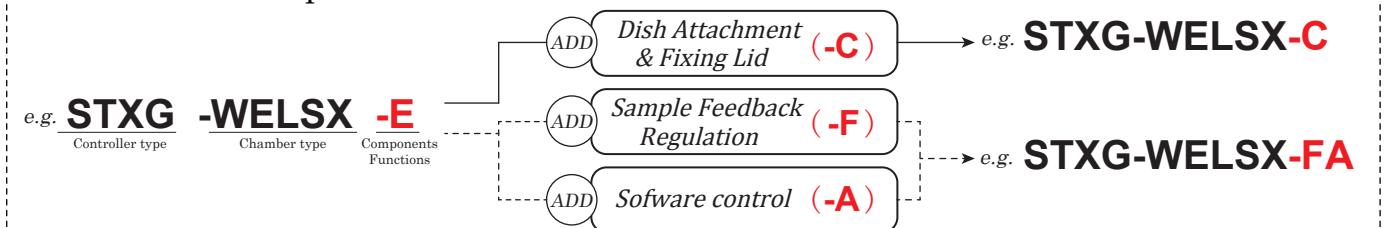


Options

Stage Adapter



Model
WELSX-K
For XY motorized stage
(160×110mm opening)

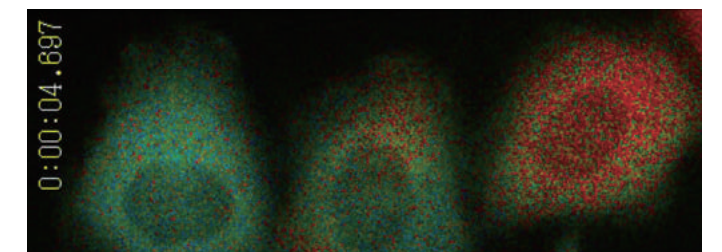

Courtesy of Dr. Takeharu Nagai, The Institute of Scientific and Industrial Research, Osaka University

ThermoBox for microscopes

ThermoBox

Maintains a stable cell culturing environment at places where the temperature fluctuation occur. By isolating the microscope from the environment, it also prevents the focus drift caused by the thermal expansion of microscope itself.

Features

ThermoBox for Axio Observer



Box installation is possible without removing the TFT touch panel.

No duct required


Saves your working and setting space with built-in fan heaters. No air-duct is required for heating.

Available as a simple dark box



The black type is light shielding property and can be used as a simple dark box.

Anti-vibration heater

With anti-vibration design, the system can be used under confocal without image drift.

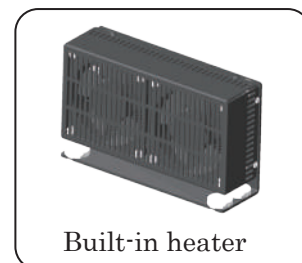

Anti-vibration
test movie

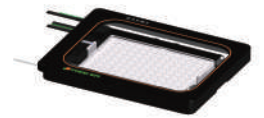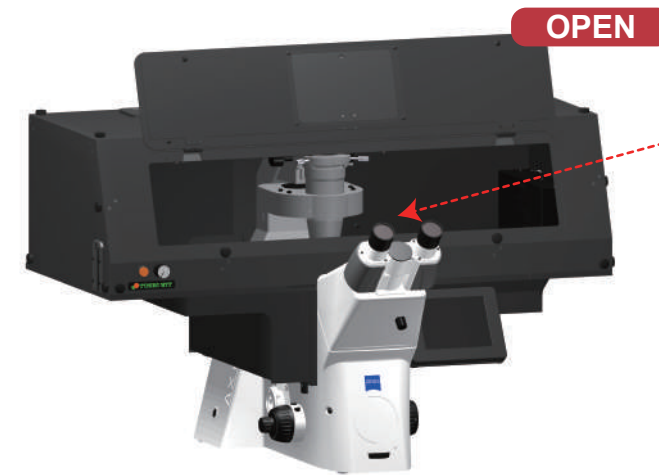

The combination use of Stage Top Incubator and ThermoBox will increase the stability of the cell culturing environment especially the room temp. is unstable and the microscope is close to air conditioner.

Line-up

Microscope	Stage	Color	Heater	Model
Axio Observer	Motorized stage (130×100 STEP)	Black type with LED	With heater	Model AXIOTB-BK
	Manual stage		No heater	Model AXIOTB-BK-NH




* Depending on the accessories (camera, stage etc.), the model may be a customized model. Please contact us for details.

* Clear type is available as a customized model.

Specifications

Easy setup

The panels are not separated one by one. It can be setup very easily by covering the box from the top.

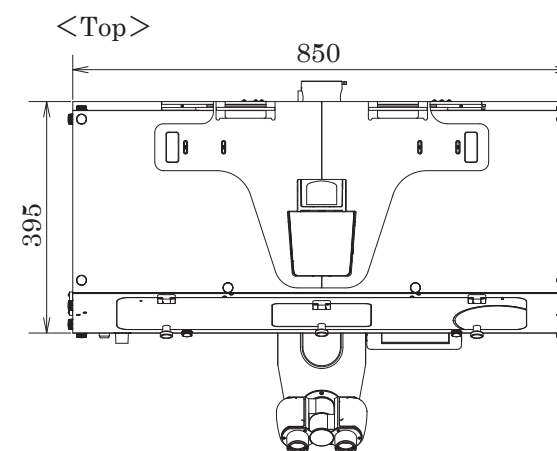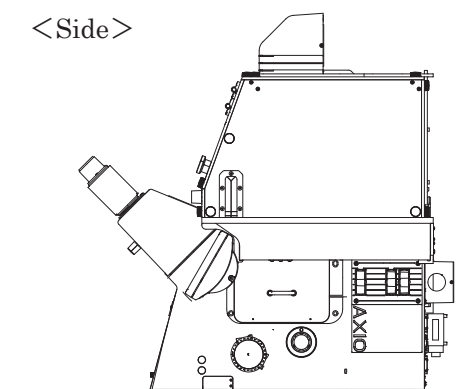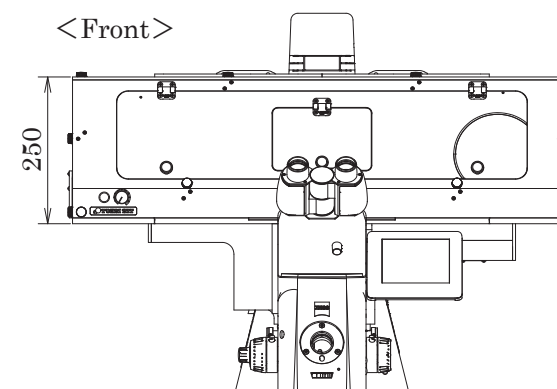

- Dimensions of box : W850×D395×H250 (mm)
- Dimensions of controller : W81×D305×H211 (mm)
- Temp. setting range : Ambient~45°C (With Heater)

Add-on options

We offer the suitable solutions depending on your experiments.

Program fluidic control system


Perfusion, Media Exchange, Drug Delivery and Mixing can be easily programmed and done without disturbing your sample.

Model **PMD-D35**

※For STX/STR/INU Chamber
※For 35mm dish


【Specification】

Continuous Perfusion : 40μL/min~100μL/min
Media Exchange volume : 0.6ml~5.0ml
Media Exchange Number : Maximum 10 times
Drug Delivery : 20μL~
Controller size : W175×D175×H195 (mm)

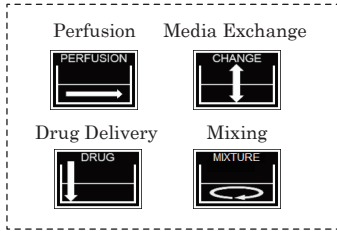

System Image

<Controller>

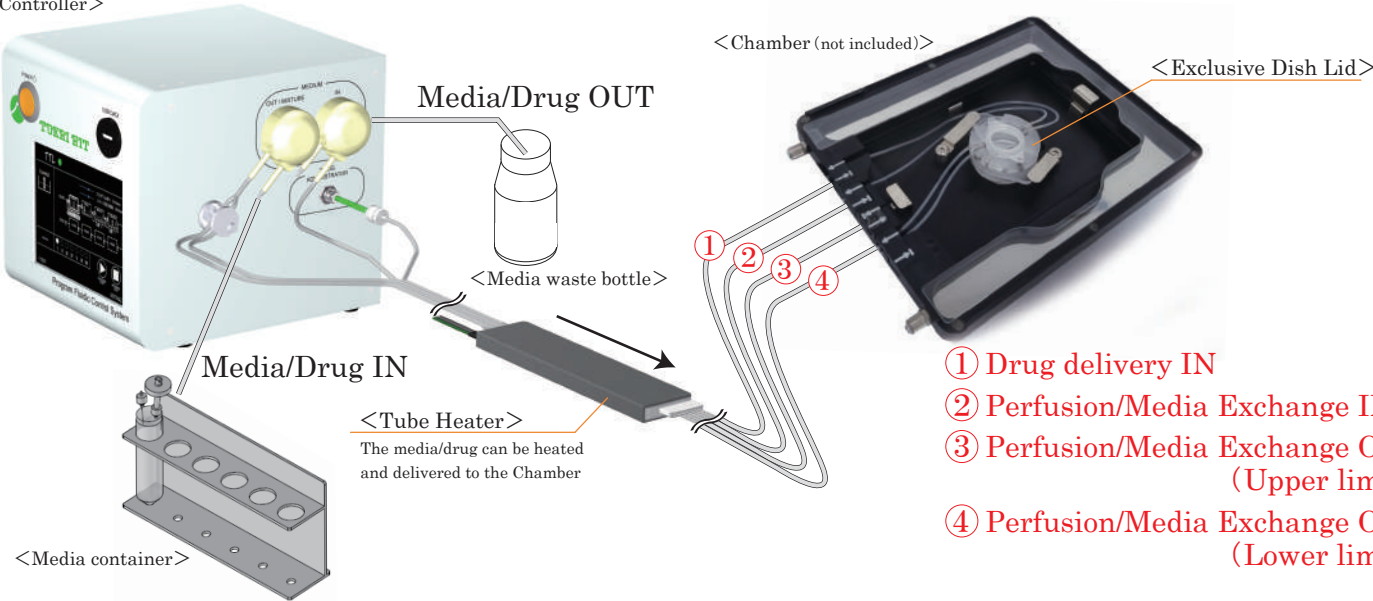

【Components】

- Controller
 - Tube Heater
 - Tubes (IN/OUT, with drug delivery fitting)
 - Media containers (For perfusion, Media Exchange)
- ※Media waste bottle is not included

- Enables to mix the media and drug to be uniformly after the drug delivery.
- Setting of suction / supply liquid volume at a finer flow rate is possible.
- Regulates the system with TTL IN/OUT.
- High-repeatability experiments are possible by keeping the media level evenly.
- With a built-in tube heater, one fluidic control system can be completed with one system.
- Supports general 35mm dish.
- Manages each user's program individually by using USB memory.

- ① Drug delivery IN
- ② Perfusion/Media Exchange IN
- ③ Perfusion/Media Exchange OUT (Upper limit)
- ④ Perfusion/Media Exchange OUT (Lower limit)

Perfusion/Media exchange system

Perfusion/Media exchange without removing a dish lid is possible.
Prevents media evaporation and contamination during long-term imaging.

Model **KSX-Type1**
KS-Type1


*For STX/STR Chamber
*For INU Chamber

【Components】

- Peristaltic pumps ×2 KS-PUMP
- Media Exchange Lid LX-D35FME
- Diamond Insert KS-DIA
- Tube
- Glass bottle with air filter KS-BOTTLE
- Media waste bottle is not included

【Specification】

Pump flow rate : 0.05~0.145ml/min
(by using the attached tube)
Pump dimensions : W73×D208×H144 (mm)
Silicon tube : OD 3.0mm, ID 1.0mm (disposable)

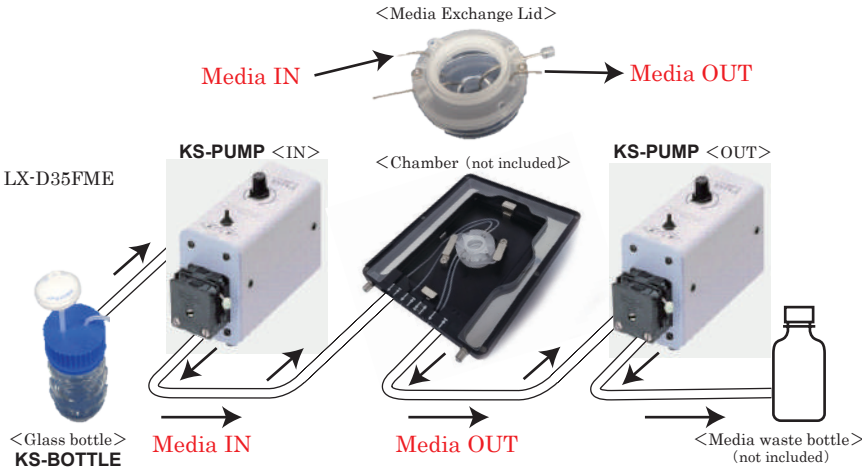

One-push drug delivery system


Rapid and vibration-free drug delivery is possible.
Prevents media evaporation and contamination during long-term imaging.

Model **KSX-Type2**
KS-Type2

*For STX/STR Chamber
*For INU Chamber

【Specification】

Dosage : 20μL~100μL
(Contact us if different dosage needed)
Controller dimensions : W100×D165×H116 (mm)
Silicon tube : OD 3.0mm, ID 1.0mm
(Tube of the Dish side is disposable)

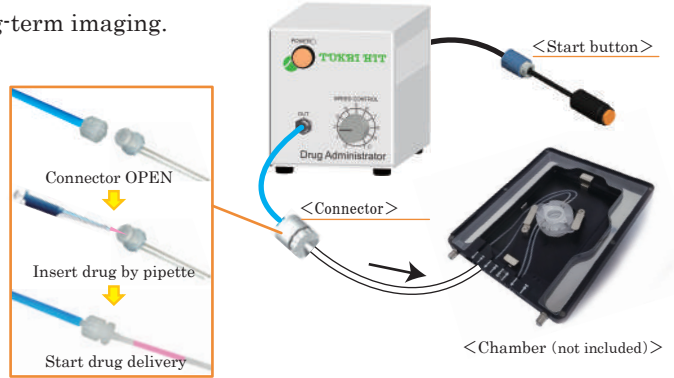

Digital Gas Mixer

Digital Gas Mixer for Stage Top Incubator. You can choose depending on the usage gas cylinder.

For **STX** series



Model **STX-CO2O2**
For low oxygen (Hypoxia)

O₂ concentration : 0.1~18.0%
CO₂ concentration : 5.0~20.0%
Gas cylinder : 100%CO₂&100%N₂
Dimensions : W160×D271×H250



Model **STX-CO2**
For CO₂ concentration

CO₂ concentration : 5.0~20.0%
Gas cylinder : 100%CO₂
Dimensions : W115×D271×H250
* For STXF Controller



Model **STX-O2**
For O₂ concentration

O₂ concentration : 0.1~18.0%
Gas cylinder : 100%N₂
Dimensions : W115×D271×H250
* Must use with STX-CO2

For **STX** series



Model **GM-8000**
For low oxygen (Hypoxia)

O₂ concentration : 0.1~18.0%
CO₂ concentration : 5.0~20.0%
Gas cylinder : 100%CO₂&100%N₂
Dimensions : W160×D260×H187



Model **GM-4000**
For CO₂ conc.& flow rate

CO₂ concentration : 5.0~20.0%
CO₂ flow rate : 50~200ml/min
Gas cylinder : 100%CO₂
Dimensions : W120×D175×H156



Model **GM-2000**
For supplying fixed 5%CO₂

CO₂ concentration : Fixed 5.0%
Gas cylinder : 100%CO₂
Dimensions : W120×D175×H156

Media leakage detector

Detects the media leakage and stop the media pumps to prevent overflow
of media and damage to microscope.

<Chamber for well-plate use>


Model **LM-UNIV2-D35**

<Chamber for small vessels use>

Model **LM-UNIV-D35**

【Specification】

Sensored Dish Attachment
Controller dimensions : W120×D175×H156 (mm)

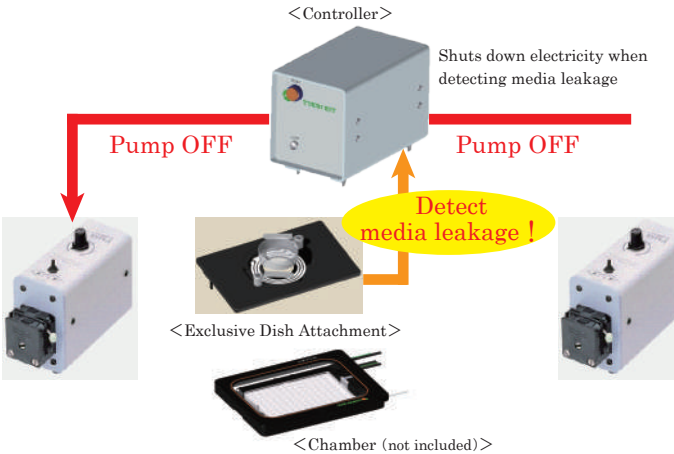

Glass/Metal Heater for microscope ThermoPlate®

Persues high-end “User-Friendliness”

Ensure more accurate and more reliable thermal control of the specimens during the observation under a microscope.
Wide product range supports Biotechnology Science and Industry.



TPi SERIES New Intelligent ThermoPlate

Realized downsizing and weight saving of cotroller compared to TP/TPX series.
Multi-function system supports temperature management in various fields such as biological science.

Features

Compact Controller

Miniaturize the controller to as same size as smart-phone
It is very useful for space saving in the clean bench.

Controller dimensions : W85×D135×H30 (mm)
Size : 232 (cm³) *82% decreased
Weight : 170 (g) *62% decreased

In addition to flat placement(left), stand upright (center) and wall hanging (right) are available with attached mounting hook depending on the location of use. The mounting hook is durable design with a load capacity of 2 kg and thin.

<Flat placement>



<Stand upright>



<Wall hanging>



Simple temp. measurement

Attached sterilized sensor can measure the actual temperature and correct the plate surface temperature.
Enable to monitor and log the data of temperature which the sensor measures.



One-touch calibration

Easy calibration to set the suitable PID value on your usage environment is available with just one-touch.

*Tokai Hit's ThermoPlate is calibrated with the controller and the plate as a set to make the center of the plate temp. to be at 37.0°C when the room temp. is 25°C±2°C prior to the shipping.

10 year free-repair service for glass breakage

Applied strengthen glass for the glass heater and with 10 year free-repair service for glass breakage.*1
No more glass breakage and no more stopping your experiment.

*1. Depending on the model



10year warranty

Stress-Free from glass breakage



Reference movie :
Glass strength test
(Drop ball)



Plate LED Indicator

Plate LED Indicator visualizes the plate condition by not seeing the controller.
Green LED lights up when the glass heater is ready.




Statement of LED	Condition of the plate
Lights up	The plate surface temp. is stable at the setting temp..
Blinks slowly (1.0 sec. period)	Calibration is running.
Blinks fast (0.2 sec. period)	An error occurred.

*Plate LED is attached to some major models.

Continuous current control

In addition to PID control, Continuous Current Control minimizes the focus drift generated by thermal expansion and it also prevents light intensity change compared to the conventional ON/OFF control.

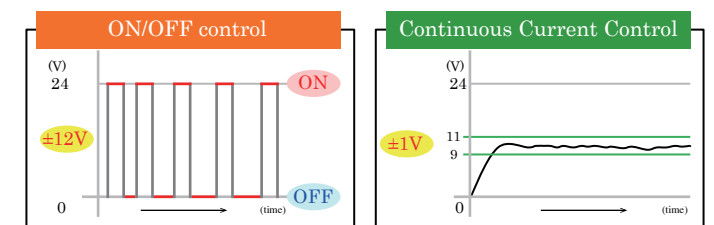

Line-up

Glass Plate

Tokai Hit's Glass Heater Standards

Temp. setting range : Ambient - 60°C (* Depending on the model)

Original clear glass heater maintains stable temperature. Support the needs in different various fields such as Time-Lapse in low magnification and/or IVF field.



<Components>

Glass Plate	○
Controller	○
External Sensor	○
Extension Wire	○
Logging Software TEM	○



INVERTED

Microscope : **Axio Observer / Axiovert series**

Applicable stage : K-type frame stage



Model **TPI-SQFTX**

Glass thickness : 0.5 (mm)
Plate dimensions : W160×D110 (mm)
Heating area : W135×D95 (mm)

Microscope : **Axio Observer / Axiovert series**

Applicable stage : M-type frame stage



Model **TPI-SQMX**


Glass thickness : 0.5 (mm)
Plate dimensions : W165×D105 (mm)
Heating area : W129×D86 (mm)



UPRIGHT

Microscope : **Axio Examiner, Axio Imager Upright microscopes**

Applicable stage : XY mechanical stage

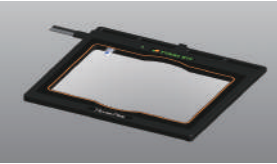

Model **TPI-SX**

Glass thickness : 0.5 (mm)
Plate dimensions : W142×D115 (mm)
Heating area : W128×D95 (mm)



Applied strengthen glass and with
10 year free-repair service for glass breakage



Reference movie : ICSI



STEREO

Microscope : **Stemi305/508**

Illumination base : Stand K (EDU/LAB)




Model **TPI-STKX**

Glass thickness : 1.0 (mm)
Plate dimensions : W155×D204 (mm)
Heating area : W120×D150 (mm)

Microscope : **Stemi305/508**

Illumination base : Stand M

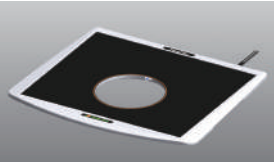

Model **TPI-STMX**

Glass thickness : 1.0 (mm)
Plate dimensions : W272×D227 (mm)
Heating area : W230×D190 (mm)

Microscope : **Stemi2000**

Illumination base : Illumination base 455137



Model **TPI-STRX**

Glass thickness : 1.0 (mm)
Plate dimension : φ 155 (mm)
Heating area : W113×D89 (mm)

Microscope : **Axio Zoom V16, Stemi305/508**

Illumination base : Transmitted Light Base 300



Model **TPI-TB300X**

Glass thickness : 1.0 (mm)
Plate dimensions : W280×D266 (mm)
Heating area : W185×D175 (mm)

Microscope : **SteREO Discovery / Stemi2000**

Illumination base : Stand N495052 9801



Model **TPI-ST2X**

Glass thickness : 1.0 (mm)
Plate dimensions : W160×D210 (mm)
Heating area : W134×D190 (mm)

Microscope : **Discovery.V12 / Lumar.V12L**

Illumination base : Exclusive illumination base



Model **TPI-V12**

Glass thickness : 1.0 (mm)
Plate dimensions : W423.5×D251.5 (mm)
Heating area : W300×D150 (mm)

UNIVERSAL

For various types of illumination bases



Model **TPI-UNIX**


Glass thickness : 1.5 (mm)
Plate dimensions : W435×D220 (mm)
Heating area : W400×D175 (mm)
Leg adjustment : 75~100 (mm)
* Temp. setting : Ambient~50°C

Large Glass Type



Model **TPI-W**

Glass thickness : 1.5 (mm)
Plate dimensions : W230×D180 (mm)
Heating area : W180×D140 (mm)

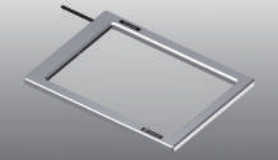

Model **TPI-WL**

Glass thickness : 1.5 (mm)
Plate dimensions : W310×D220 (mm)
Heating area : W250×D170 (mm)



Metal Plate

For oil/water immersion objective and high-magnification objective imaging

Temp. setting range : Ambient - 60°C

Focus drift is caused by thermal expansion from the ordinaly ON/OFF regulation.
Tokai Hit is applying Continuous Current Control regulation as standard to minimize focus drift.




<Components>

Metal Plate with a hole	○
Controller	○
External Sensor	○
Extension Wire	○
Logging Software TEM	○




INVERTED

Microscope : **Axio Observer / Axiovert series**
Applicable stage : K-type frame stage

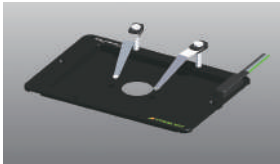

Model **TPi-SQH26FT**
Plate dimensions : W160×D110 (mm)
With a hole (φ 26mm)
* Surface flat type

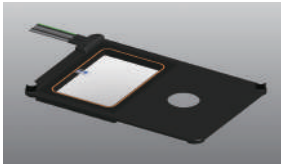


Model **TPiD-I2X**
Plate dimensions : W160×D110 (mm)
* 2 in 1 type

Options



Lens Heater
Model **TPiE-LH**
Temp. setting range : Ambient - 45°C
Prevents heat loss from the sample especially when using oil/water immersion objective and high-magnification objective.

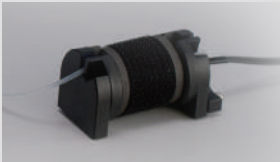

Tube Heater
Model **TPiE-TH**
Temp. setting range : Ambient - 50°C
A compact barrel-type heater. Simply wrap the media tubing for heating the media before inserting it to Chamber Unit.



Hot Plate
Model **TPiE-SP/SPE**
Temp. setting range : Ambient - 45°C
Light-weight and thin aluminum thermal plate
TPiE-SP : W482×D282 (mm)
TPiE-SPE : W282×D232 (mm)



Ultra Low-noise Plate

Suitable to maintain sample temp. during potential mesurement in life science field


Temp. setting range : Ambient - 60°C

Incorporate shield mechanism to reduce noise.
Minimize noise from surface of the plate because the whole surface of the glass heater is connected to the earth.



UPRIGHT

Microscope : **Upright microscope**
Applicable stage : XY mechanical stage

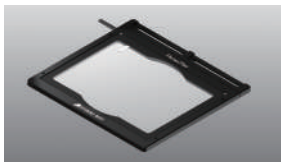

Model **TPiN-NLS**
Glass thickness : 0.7 (mm)
Plate dimensions : W142×D115 (mm)
Heating area : W128×D95 (mm)

<Components>

Metal Plate with a hole	○
Controller	○
External Sensor	×
Extension Wire	×
Logging Software TEM	×



Noiseless type controller



Cooling/Heating Plate

Best for observing yeast, plants, marine samples, cultured cell, C. elegans and/or Planarian, etc.

Temp. setting range : 4°C - 60°C

With electronic cooling element (Peltier module) and original control system, it allows responsive cooling and heating regulation.



<Components>

Metal Plate with a hole	○
Controller	○
External Sensor	×
Extension Wire	×
Logging Software TEM	×
Chiller Unit	○

37°C	Cultured Cell
28°C	Zebrafish
25°C	Drosophila
20°C	C. elegans

Effective for controlling the sample temp. around room temp.

Usually, it is difficult to control the temperature around room temperature because of the small temperature difference between the room temperature and the sample temperature. However, Tokai Hit Cooling/Heating Plate has both cooling and heating functions and can control the temperature around the room temperature acculately without any change-over switch.

It also can be used for controlling activation of the common samples which a normally cultured at 37.0 degree C by lowering the temperature or observe expressions of samples at each temperature.



INVERTED

Microscope : **Axio Observer / Axiovert series**
Applicable stage : K-type frame stage



<With Chiller Unit>
Model **TP-CHSQ-C**
Plate dimensions : W160×D110 (mm)
With a hole (φ 20mm)

Microscope : **Axio Observer / Axiovert series**
Applicable stage : M-type frame stage



<With Chiller Unit>
Model **TP-CHSQM-C**
Plate dimensions : W165×D105 (mm)
With a hole (φ 20mm)




UPRIGHT

Microscope : **Upright microscope**
Applicable stage : XY mechanical stage



<With Chiller Unit>
Model **TP-CHS-C**
Plate dimensions : W110×D110 (mm)
With a hole (φ 20mm)

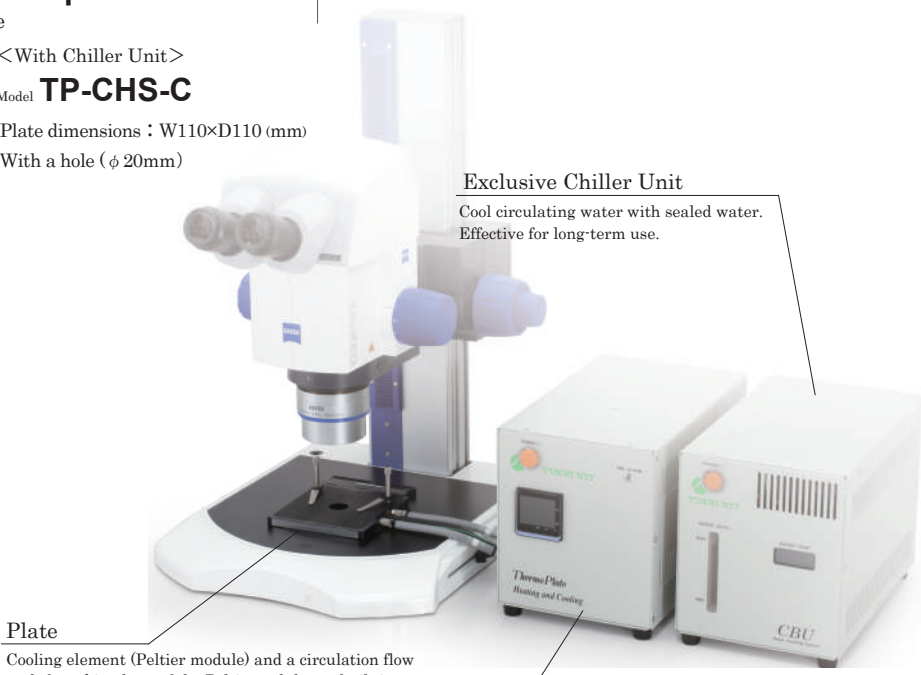

Plate

Cooling element (Peltier module) and a circulation flow path for taking heat of the Peltie module are built in.

Controller

Temperature controller and pump for circulating water are built in.

Exclusive Chiller Unit

Cool circulating water with sealed water. Effective for long-term use.

We are accepting customization according to the application and conditions. Please feel free to contact us.

2-channel controller (Option)


2 plates can be controlled by TPiD controller.
Every combination is possible

TPiD
SERIES

Ex1 : Glass (for inverted)+ Glass (for stereo)



Ex2 : Glass (for stereo)+ Glass (for stereo)

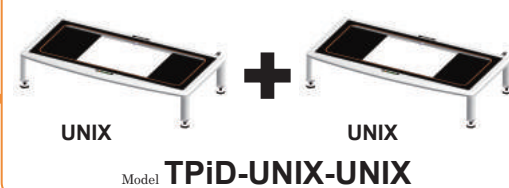

Ex3 : Metal (for inverted)+ Lens Heater



Ex4 : Glass (for inverted)+ Hot Plate



Entire Surface Heating Plate

Temp. control before/after observation

Temp. setting range : Ambient - 50°C



10year warranty
Stress-Free from glass breakage

TPiD
SERIES

Since the entire surface of the plate is heated, it can manage the temp. of the sample under observation as well as the sample before/after observation. It is very useful when dealing with many samples.

Microscope : **Stemi305/508**


Illumination base : Stand M

Model **TPiD-STMDX**

Glass thickness : 0.5 (mm)

Plate dimensions : W370×D248 (mm)

Heating area : <Glass part> W128×D95 (mm)

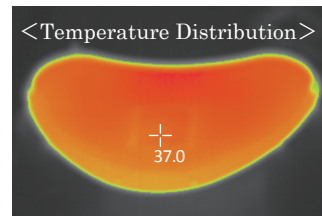

Enables to keep the vessels warm before and after observation.



ThermoPlate for Vitrification

For thawing process of frozen embryo

Temp. setting range : Ambient - 60°C




10year warranty
Stress-Free from glass breakage

TPiD
SERIES

Model **TPiD-VITX**

For various types of illumination bases
(Universal type)

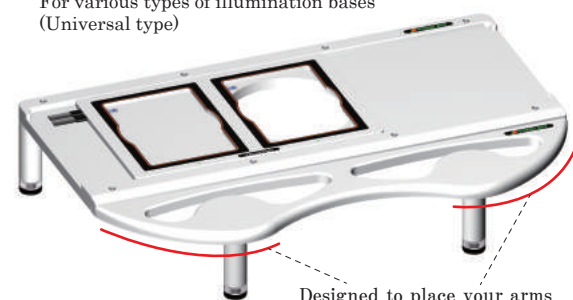

Designed to place your arms


Base dimensions : W435×D280 (mm)

Glass thickness : 0.5 (mm)

Plate dimensions : W230×D148 (mm)


Leg adjustment : 75~100 (mm)

Heating area : W95×D128 (mm)×2

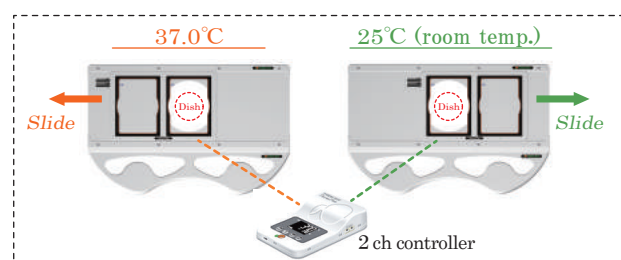

Abundant experiences more than 100 products per year

Our experienced staff and engineers will accomodate your requests.

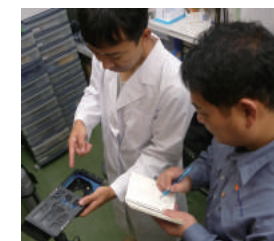

Hearing



Design



Machining



Assembly

Customizaion reference



• Incubation system for MED64

This device has been designed on the assumptions of an experiment of electrophysiology. Enable the low noise attribution under the cell culturing environment.

With built-in digital gas mixer Model **INUG2M-MED**

With built-in analog flow meter Model **INUM-MED-F1**

Temperature Controller only Model **INUM-MED**

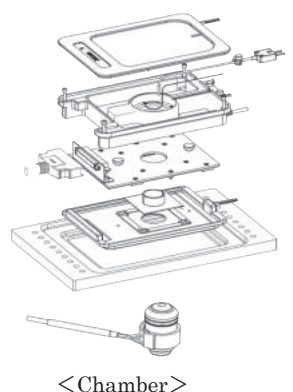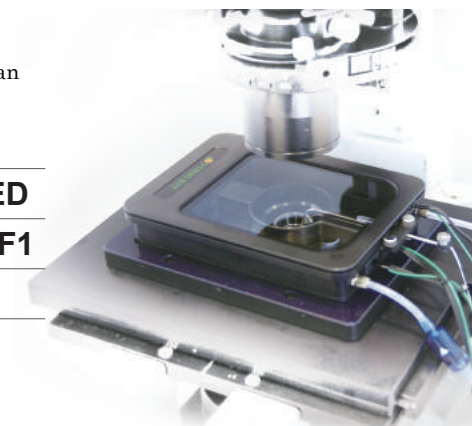

<Chamber>


• KW / KD series

BOX-type ThermoPlate with a gas port.


- For inverted microscope
- Setting temp. : Ambient~50°C (Plate temp.)
- Top Glass Heater prevents the condensation of the dish.
- Double Heater system (Top Heater/Stage Heater) keeps the suitable sample temp.

For well-plate use Model **TPiD-KW**

For 35mm dish use Model **TPiD-KD**

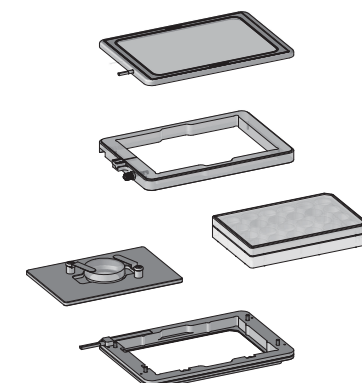

<TPiD-KW>

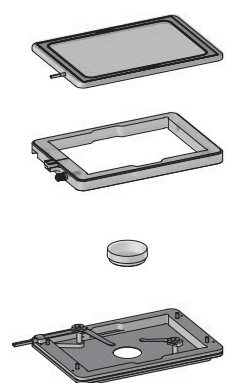

<TPiD-KD>

• Chamber for MEMS

Customized attachments or spacers are available for your usage vessels.
In addition, attachments for patch clamp are also available.

• Built-in Heater

It is possible to customize heater for your system. We can manage the length of cable, corresponding temperature etc..

* We have designed multiple attachments and/or fixing holders for various vessels like original PDMS, marketed dish etc. Please feel free to contact Tokai Hit.